


F110 FULLY RUGGED TABLET



- 11th Generation Intel® Core™ i7 / i5 vPro® Processor
- Thunderbolt™ 4 brings lightning speed and performance
- Enhanced enterprise security with optional Intel® vPro™, Windows Hello face-authentication camera, TPM 2.0 and many more multi-factor authentication options
- Configurable options to fit diverse data collection needs: Optional 1D/2D imager barcode reader / USB 2.0 port / Serial port + LAN port (RJ45)
- LifeSupport battery swappable technology



F110 3D demo

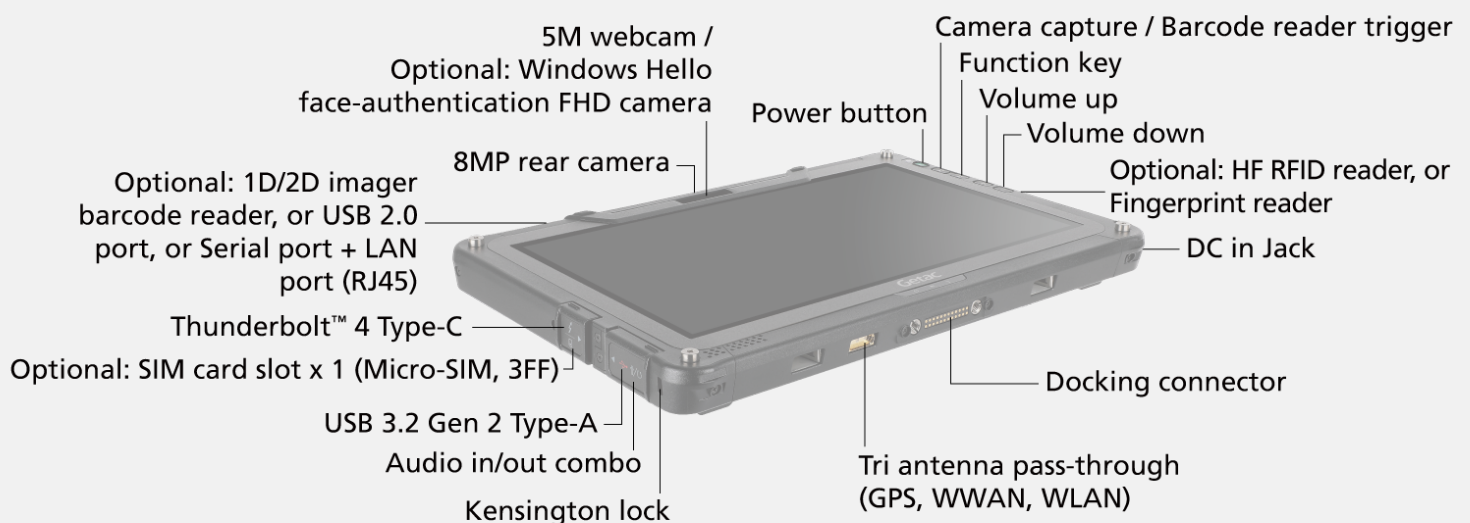

SPECIFICATIONS

Generation
G6

Operating System
Windows 11 Pro

Mobile Computing Platform
Intel® Core™ i5-1135G7 Processor
Max. 4.2GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

Platform options:
Intel® Core™ i5-1145G7 vPro® Processor
Max. 4.4GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

Intel® Core™ i7-1165G7 Processor
Max. 4.7GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i7-1185G7 vPro® Processor
Max. 4.8GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

VGA Controller
Intel® UHD Graphics

Display
11.6" Wide Viewing Angle TFT LCD FHD (1920 x 1080)
Protection film
1,000 nits LumiBond display
with Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory
8GB DDR4
Optional: 16GB / 32GB DDR4

256GB PCIe NVMe SSD
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Keyboard
Power button
4 tablet programmable buttons

Pointing Device
Touchscreen
- Capacitive multi-touch screen
- Optional: Dual mode touchscreen
(multi-touch and digitizer)

Expansion Slot
Optional: Smart card reader
Optional: 1D/2D imager barcode reader,
or USB 2.0 port, or LAN (RJ45),
or serial port + LAN (RJ45) ⁱ
Optional ⁱⁱ: HF RFID Reader, or Fingerprint Reader

I/O Interface
5M webcam x 1 ⁱⁱⁱ
8M pixels auto focus rear camera x 1
Audio in/out combo x 1
DC in Jack x 1
Thunderbolt™ 4 Type-C x 1
USB 3.2 Gen 2 Type-A x 1
Docking connector x 1
Optional: SIM card slot x 1 (Micro-SIM, 3FF) ^{iv}
Optional: Windows Hello face-authentication
FHD camera (front facing) x 1 ⁱⁱⁱ
Optional: RF antenna pass-through for GPS,
WWAN and WLAN

Communication Interface
Intel® Wi-Fi 6 AX201, 802.11ax
Bluetooth (v5.2) ^v
Optional: 4G LTE mobile broadband
with integrated GPS ^{iv}
Optional: 10/100/1000 base-T Ethernet ⁱ
(Occupies expansion slot)
Optional: 5G Sub-6 with integrated L1/L5 GPS ^{vi, xv}

Security Feature
TPM 2.0
Kensington lock
Optional: Intel® vPro® Technology
Optional: HF RFID Reader ^{vi},
or Smart Card Reader, or Fingerprint Reader ⁱⁱ
Optional: Windows Hello face-authentication
FHD camera (front-facing) ⁱⁱⁱ

Power
AC adapter (90W,100-240VAC, 50/60Hz)
Li-ion battery (11.4V,typical 2680mAh;min. 2640mAh) x 2
LifeSupport battery swappable technology
Optional: High capacity Li-ion battery (11.1V,
typical 4200mAh; min.4080mAh) x 2

Dimension (W x D x H) & Weight
314 x 207 x 25mm (12.4" x 8.15" x 0.98")
1.52kg (3.35lbs) ^{xiii}

Rugged Feature
MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified ^{ix}
Vibration & 6ft (1.8m) drop resistant
Optional: ANSI/UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D) ^x

Environmental Specifications
Temperature ^{xi} :
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software
Getac Utility
Getac Camera
Getac Geolocation
Getac Barcode Manager ^{xii}
Getac Driving Safety Utility (trial version)
Getac KeyWedge Barcode Reader Utility (trial version)
Optional: Absolute Persistence®

Optional software
Getac Driving Safety Utility
Getac KeyWedge Barcode Reader Utility
Getac Device Monitoring System (GDMS)
Getac VGPS Utility ^{xiii}

Accessories
Battery (11.4V, typical 2680mAh; min. 2640mAh)
AC adapter (90W, 100-240VAC, 50 / 60Hz)
Capacitive stylus with tether

Optional:
Carry bag
Battery (11.4V, typical 2680mAh; min. 2640mAh)
High capacity Li-ion battery (11.1V,
typical 4200mAh; min.4080mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (90W, 100-240VAC, 50 / 60Hz)
Office dock AC adapter (90W, 100-240VAC)
MIL-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Digitizer pen with tether
Capacitive stylus with tether
Protection film
Hard handle
Hand strap
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
Detachable keyboard ^{xiv}
Vehicle cradle ^{xiv}
Vehicle dock ^{xiv}
Office dock
DS100 USB-C docking station
Spare SSD kit
100W Type-C adapter
Getac rugged keyboard

Bumper-to-Bumper warranty
Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime. That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

Standard
3 years Bumper-to-Bumper

F110 FULLY RUGGED TABLET

- I. 1D/2D imager barcode reader, or USB (USB 2.0) port, or Serial port + LAN are mutually exclusive options.
- II. HF RFID reader and fingerprint reader are mutually exclusive options
- III. 5M webcam and optional Windows Hello face-authentication FHD camera (front-facing) are mutually exclusive options.
- IV. Units with 4G LTE option comes with an embedded SIM card slot.
- V. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- VI. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- VII. 13.56MHz HF RFID reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- VIII. Weight and dimensions vary from configurations and optional accessories; optional high-capacity batteries add approx. 6mm (H), 0.24kg.
- IX. MIL-STD-461 90W AC adapter sold separately.
- X. Available with limited configurations and environment conditions.
- XI. Tested by an independent third-party test lab following MIL-STD-810H.
- XII. Available when barcode reader option is selected.
- XIII. Models require either embedded or standalone GPS module.
- XIV. Gamber Johnson and Havis vehicle docks are e-mark certified.
- XV. Support GPS, GLONASS, Galileo, BeiDou and QZSS. Only available in US, UK, EU, Australia and New Zealand.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	2	2
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	4	4
LAN	1	1
HDMI 1.4	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-



Getac USA

15495 Sand Canyon Ave. Suite 350 Irvine,
CA 92618 Tel : 949-681-2900
GetacSales_US@getac.com |
www.getac.com/us/
Copyright © 2023 Getac Technology Corporation
and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference
only,available specification shall be subjected to
quotation by request.